





RECOIL SYSTEM TROLLEY MOUNTED ON BEARINGS

The use of a trolley with wheels mounted on bearings allows a smoother hose sliding, less wearing on components on long terms and then less maintenance.

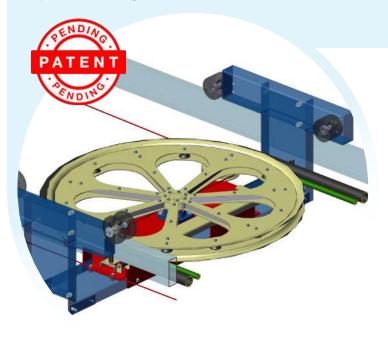




IRMO4

Hmax

IRMO3


NEW INSITE INSTALLATION


The **new rail frame**, designed according to its support, allows to be fitted easily: it is enough lay the rail on the proper **housing** present on both support side and connect components by pull-down couplings.





The new drive unit and hose supports configuration reduce the gap under the shade net: it allows to increase the ground clearance about 130 [mm].

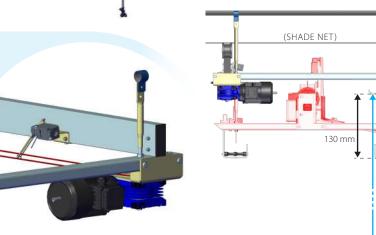

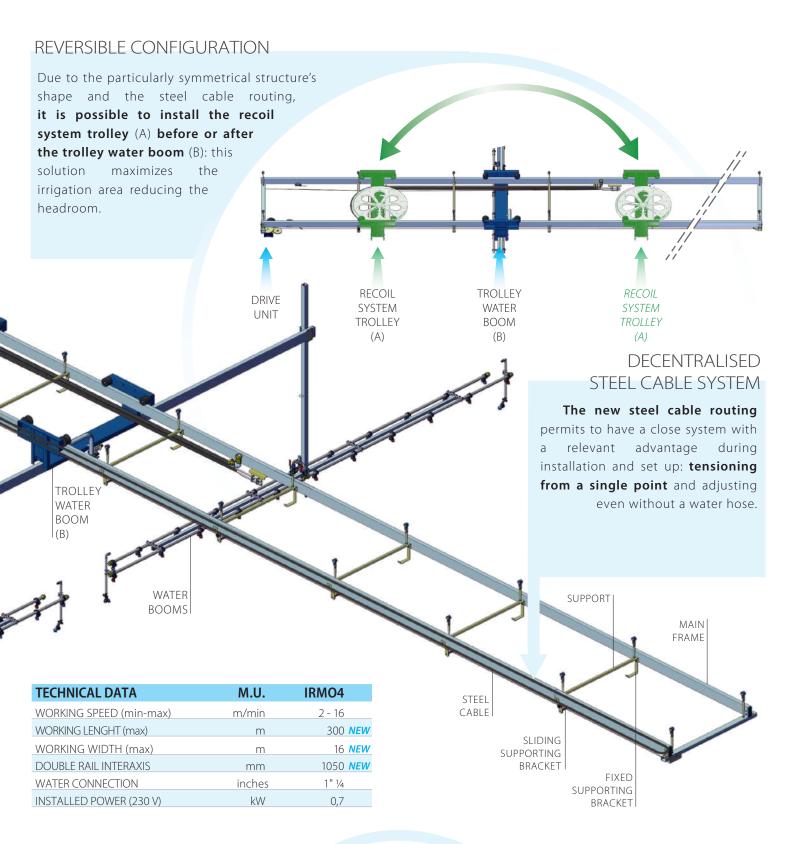

NEW FEATURE

Programmable through a simple and intuitive interface, it has been extended the possibility to customize the zone setting speed and number of cycles to each one in a unique cycle.

8 electro-valves may be handled independently.



The remote control can manage up to 240 irrigation booms and it is available in two versions: "easy" used to control basic functions; "mod-rem", provided by wider display, used to controls all the functions.



